

TX Type

3.2 x 2.5 mm SMD Voltage Controlled Temperature Compensated Crystal Oscillator



FEATURE

- Typical 3.2 x 2.5 x 0.9 mm SMD.
- For automatic assembly.
- Compactness and lightweight.
- Low power consumption.
- VCTCXO available.
- Low thickness

TYPICAL APPLICATION


- GPS
- WiMAX, WLAN
- Mobile Phone

DIMENSION (mm)

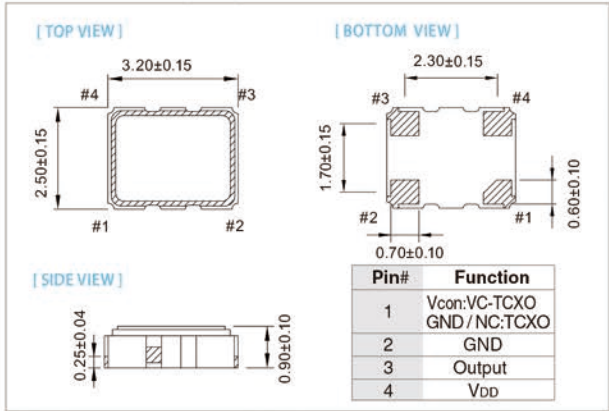

RoHS Compliant

SOLDER PAD LAYOUT (mm)

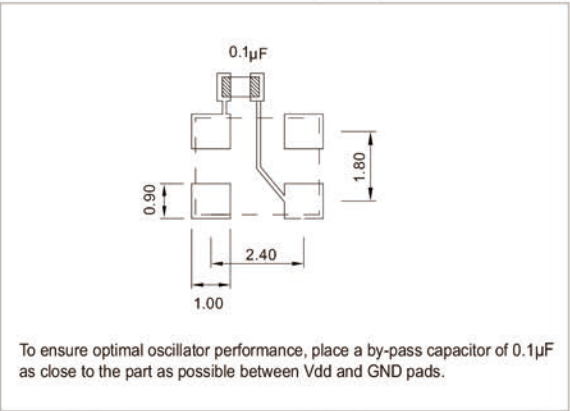

ELECTRICAL SPECIFICATION

Parameter		3.3 / 3.0 / 2.8 V		2.5 V		1.8 V		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)		2.66	3.465	2.375	2.625	1.71	1.89	V
Frequency Range		10	52	10	52	10	52	MHz
Standard Frequency		10, 12.8, 13, 16.367667, 16.368, 16.369, 19.2, 19.44, 20, 25, 26, 27, 30, 30.72, 32, 38.4						
Frequency Tolerance*		—	±2.0	—	±2.0	—	±2.0	ppm
Frequency stability								ppm
Vs Supply Voltage (±5%) change		—	±0.2	—	±0.2	—	±0.2	
Vs Load (±10%) change		—	±0.2	—	±0.2	—	±0.2	
Vs Aging (@ 1st year)		—	±1.0	—	±1.0	—	±1.0	
Supply Current 10 MHz ≤ Fo ≤ 26 MHz		—	1.5	—	1.5	—	1.5	mA
26 MHz < Fo ≤ 52 MHz		—	2.0	—	2.0	—	2.0	
Output Level (Clipped sine wave)		0.8	—	0.8	—	0.8	—	Vp-p
Load		10KΩ//10pF		10KΩ//10pF		10KΩ//10pF		
Control Voltage Range (VCTCXO)		0.5	2.5	0.4	2.4	0.3	1.5	V
Pulling Range (VCTCXO)		±5.0	—	±5.0	—	±5.0	—	ppm
Vc Input Impedance (VCTCXO)		500	—	500	—	500	—	kΩ
Phase Noise @ 19.2 MHz 100 Hz		-115		-115		-115		dBc/Hz
1 kHz		-135		-135		-135		
10 kHz		-148		-148		-148		
Start time		—	2	—	2	—	2	mSec
Storage Temp. Range		-40	85	-40	85	-40	85	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

*Frequency at 25°C, 1 hour after reflow.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C) \ ppm	±0.5	±1.0	±1.5	±2.0	±2.5
-20 ~ +70	○	○	○	○	○
-30 ~ +85	○	○	○	○	○
-40 ~ +85	○	○	○	○	○

* ○: Available △: Conditional X: Not available

Note: not all combination of options are available. Other specifications may be available upon request.

Rev(13)11/2017

Specifications subject to change without notice.